

EYP-TPA-0795-02000-4006-BTU02-0000

Revision 0.70


2023-01-18

TAPERED AMPLIFIER Semiconductor Optical Amplifier



General Product Information

| Product | Application |
|--------------------------------------------|--------------|
| 795 nm Tapered Amplifier | Spectroscopy |
| 14 Pin Butterfly Package | |
| with PM Fiber and FC/APC Connector (Input) | |
| and collimated Output Beam | |

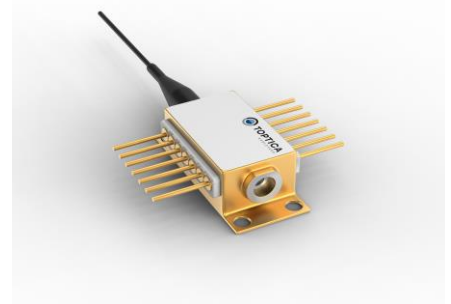

Absolute Maximum Ratings

| Parameter | Symbol | Unit | min | typ | max |
|---------------------------------|-----------|------|-----|-----|-----|
| Storage Temperature | T_S | | -40 | | 85 |
| Operational Temperature at Case | T_C | °C | -20 | | 75 |
| Forward Current | I_F | A | | | 5 |
| Reverse Voltage | V_R | V | | | 2 |
| Output Power | P_{opt} | W | | | 2.2 |
| TEC Current | I_{TEC} | A | | | 5 |
| TEC Voltage | V_{TEC} | V | | | 7 |

Measurement Conditions / Comments

Stress in excess of one of the Absolute Maximum Ratings may damage the laser. Please note that a damaging optical power level may occur although the maximum current is not reached. These are stress ratings only, and functional operation at these or any other conditions beyond those indicated under Recommended Operational Conditions is not implied.

Recommended Operational Conditions

| Parameter | Symbol | Unit | min | typ | max |
|---------------------------------|------------|------|-----|-----|-----|
| Operational Temperature at Case | T_{case} | °C | 0 | | 50 |
| Operational Temperature at Chip | T_{LD} | °C | 10 | 25 | 35 |
| Forward Current | I_F | A | | | 4 |
| Input Power | P_{opt} | mW | 10 | | 50 |
| Output Power | P_{opt} | W | | | 2 |

Measurement Conditions / Comments

measured with integrated thermistor seeding required above 2 A

with proper injection from a seed laser

Characteristics at T_{LD}

| Parameter | Symbol | Unit | min | typ | max |
|---------------------------------|-----------------|------|-----|-----|-----|
| Wavelength | λ | nm | | 795 | |
| Gain Width (FWHM) | $\Delta\lambda$ | nm | | 20 | |
| Operational Current | $I_{Op Gain}$ | A | | | 4 |
| Output Power | P_{opt} | W | 2 | | |
| Polarization | | | | TM | |
| Amplification | G | dB | | 20 | |
| Temp. Coefficient of Wavelength | $d\lambda / dT$ | nm/K | | 0.3 | |

Measurement Conditions / Comments

$P_{opt} = 2 W$

E field perpendicular to base plate at recommended maximum forward current

EYP-TPA-0795-02000-4006-BTU02-0000

Revision 0.70

2023-01-18

TAPERED AMPLIFIER Semiconductor Optical Amplifier



Characteristics at T_{LD} cont'd

| Parameter | Symbol | Unit | min | typ | max |
|---------------------------------|---------------------|------|-----|-----|-----|
| Beam Diameter horizontal | $d_{ }$ | mm | | 1 | |
| Output Divergence parallel | $\Theta_{out }$ | mrad | | 3 | |
| Output Divergence perpendicular | $\Theta_{out\perp}$ | mrad | | 3 | |

Measurement Conditions / Comments

1/e²

1/e² (full angle)

1/e² (full angle)

Thermoelectric Cooler

| Parameter | Symbol | Unit | min | typ | max |
|----------------------------------------|------------|------|-----|-----|-----|
| Current | I_{TEC} | A | | 1.2 | |
| Voltage | U_{TEC} | V | | 2 | |
| Power Dissipation (total loss at case) | P_{loss} | W | | 8 | |
| Temperature Difference | ΔT | K | | | 40 |

Measurement Conditions / Comments

$P_{opt} = 2 \text{ W}; \Delta T = 20 \text{ K}$

$P_{opt} = 2 \text{ W}; \Delta T = 20 \text{ K}$

$P_{opt} = 2 \text{ W}; \Delta T = 20 \text{ K}$

$P_{opt} = 2 \text{ W}$

EYP-TPA-0795-02000-4006-BTU02-0000

Revision 0.70

2023-01-18

TAPERED AMPLIFIER Semiconductor Optical Amplifier



Thermistor (Standard NTC Type)

| Parameter | Symbol | Unit | min | typ | max |
|--------------------------------|--------|------|-----|-------------------------|-----|
| Resistance | R | | | 10 | |
| Beta Coefficient | b | | | 3892 | |
| Steinhart & Hart Coefficient A | A | | | 1.1293×10^{-3} | |
| Steinhart & Hart Coefficient B | B | | | 2.3410×10^{-4} | |
| Steinhart & Hart Coefficient C | C | | | 8.7755×10^{-8} | |

Measurement Conditions / Comments

25° C

0° ... 50° C

EYP-TPA-0795-02000-4006-BTU02-0000

Revision 0.70


2023-01-18

TAPERED AMPLIFIER Semiconductor Optical Amplifier






Pin Assignment

| | | | |
|---|---------------------------|----|---------------------------|
| 1 | Thermoelectric Cooler (+) | 14 | Thermoelectric Cooler (-) |
| 2 | Thermistor | 13 | not connected |
| 3 | not connected | 12 | not connected |
| 4 | not connected | 11 | Amplifier (Cathode) |
| 5 | Thermistor | 10 | Amplifier (Anode) |
| 6 | not connected | 9 | not connected |
| 7 | not connected | 8 | not connected |

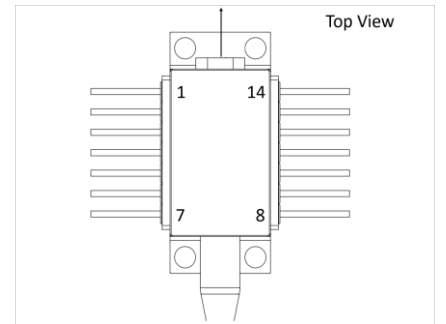

Package Drawings

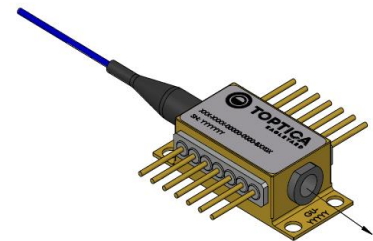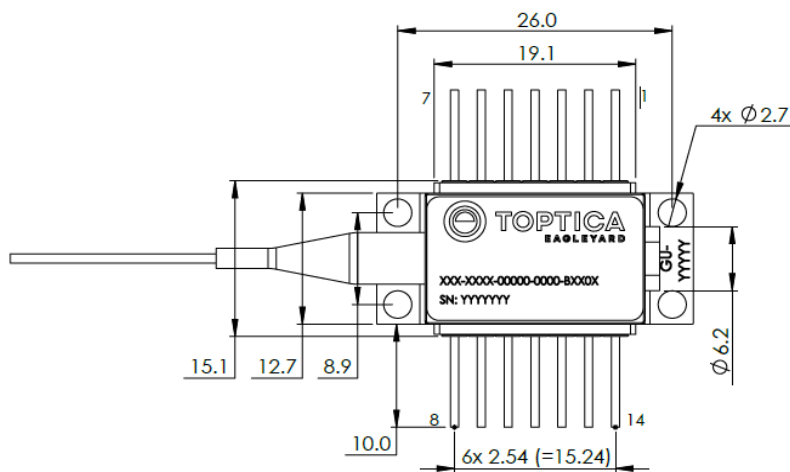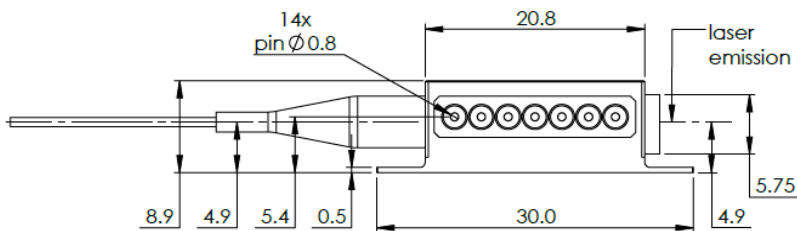

Caution. Excessive mechanical stress on the package can lead to a damage of the laser.

See [instruction manual](#) on www.toptica-eagleyard.com

SWZ-23-0117-1237

TAPERED AMPLIFIER Semiconductor Optical Amplifier



Fiber and Connector Type (Input)

Parameter

| | |
|-----------|-------------------------------------------------------------------------------|
| PM Fiber | 900 / 125 / 5.5 μ m, UV/Polyester-elastomer Coating length: 1 +/-0.1 m |
| Connector | FC/APC narrow key / 2 mm narrow key / 2 mm |

Measurement Conditions / Comments

Unpacking, Installation and Laser Safety

Unpacking the tapered amplifier should only be done at electrostatic safe workstations (EPA). Though protection against electro static discharge (ESD) is implemented in the laser package, charges may occur at surfaces. Please store this product in its original package at a dry, clean place until final use. During device installation, ESD protection has to be maintained.

The TPA diode type is known to be sensitive against thermal stress. It should not be operated without appropriate injection from a seed laser. Operating at moderate temperatures on proper heat sinks will contribute to a long lifetime of the diode.

This amplifier is designed for the setup of MOPA systems. Appropriate seed lasers are DFB lasers of the type EYP-DFB-xxxx-xxxx-1500-BFY12-000x with matching wavelengths. An external fiber isolator should be used between seed laser and amplifier in order to suppress backreflections that may disturb the

Each tapered amplifier will come with an individual test protocol verifying the parameters given in this document.

