

PM WDM FOR 2 μm OPERATION

Fused Fiber WDM


DATASHEET

The G&H fused PM WDM, combines multiple wavelengths of light in PM fiber whilst maintaining polarization.

G&H proprietary PM manufacturing technology provides low loss, with high polarization extinction ratio. The all fiber construction offers excellent reliability and high power handling characteristics.

These high performance parts are available in many wavelength configurations, housing, fiber and connector options and can therefore be readily specified in a wide variety of applications, enabling rapid design cycles and new project builds.

In common with all PM components, it is necessary to launch into either the slow or the fast axis to maintain polarization. For the G&H PM WDM, specifications are based on slow axis launch, although fast axis versions are also available if requested.

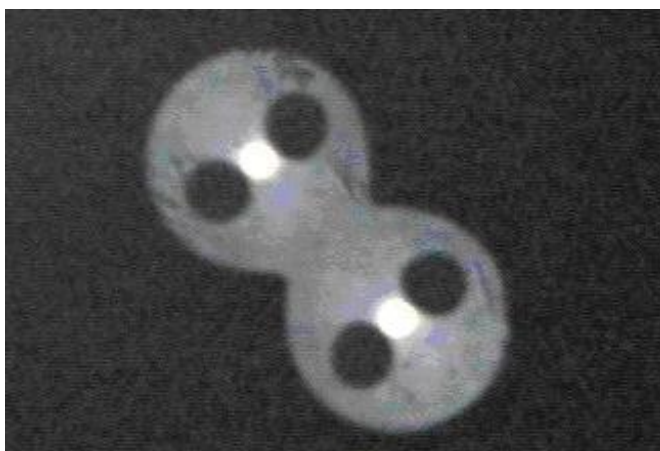

Key Features

- Low loss
- High PER
- High power handling
- PM fiber on all ports
- Slow axis operation as standard
- Fast axis operation available on request

Applications

- Telecoms
- Instrumentation
- IR Imaging
- Biomedical
- Industrial
- Defense
- IR counter measures

Ordering Information:



800 Village Walk #316
Guilford, CT 06437
Ph: 203-401-8093

Email orders to: sales@xsoptix.com
Fax orders to: 800-878-7282

Typical Optical Specifications³

Wavelength			Available Housing	CH1 Insertion Loss ¹ (dB)	CH2 Insertion Loss ¹ (dB)	CH1 PER ⁵	CH2 PER ⁵
CH1	CH2	Spacing ⁴		Max (Typ)	Max (Typ)		
1900-2100 nm	1900-2100 nm	>50 nm	3, 7,C	1.0 (0.5)	1.0 (0.5)	>15 dB	>15 dB
<1900 nm ²	1900-2100 nm	-	3, 7,C	1.0 (0.5)	1.0 (0.5)	>15 dB	>15 dB

¹ Insertion loss specified at center wavelength and room temperature.

² <1900 nm wavelength range may be below the 2nd order mode cut-off for the fiber used to manufacture this product type. Performance specified for single-mode incident on this path.

³ Custom specifications available on request.

⁴ For wavelength spacing <50 nm, please contact the sales office.

⁵ Stated value may not be guaranteed for some wavelength combinations.

Parameter	Specification
Return loss/directivity ¹	55 dB
Pigtail tensile load	5 N
Optical power handling ^{2,3}	4 W
Operating/storage temperature range	-5 – +75°C/-40 – +85°C
Fiber type ⁴	PM PANDA fiber

¹ Measured reference port P3 input for signal wavelength, P2 input for pump wavelength and P1 input for signal and pump wavelengths.

² For operation at powers of greater than 4 W the component housing and fiber must be adequately heat-sunk (for additional information contact G&H sales). Components intended for high power operation are only available in the 2x2 configuration. Component performance and reliability under high power must be determined within the customer system.


³ The performance and reliability of optical connectors is not guaranteed for optical powers of greater than 1 W.

⁴ Various fiber types available, please contact G&H sales for additional information.


Housing Option

Housing Code	Description	Max Dimensions (mm)	Pigtail
3	Regular	3.0 (Ø) x 85 (L max)	Primary-coated fiber
7	High power	5 (W) x 5 (H) x 85 (L max)	Primary-coated fiber
C	Regular high power	3.0 (Ø) x 85 (L max)	Primary-coated fiber

Configuration

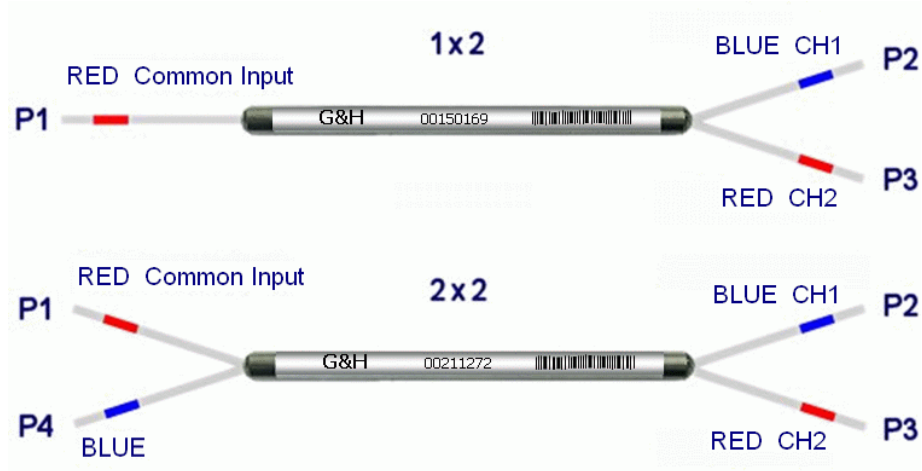

Typical Optical Performance

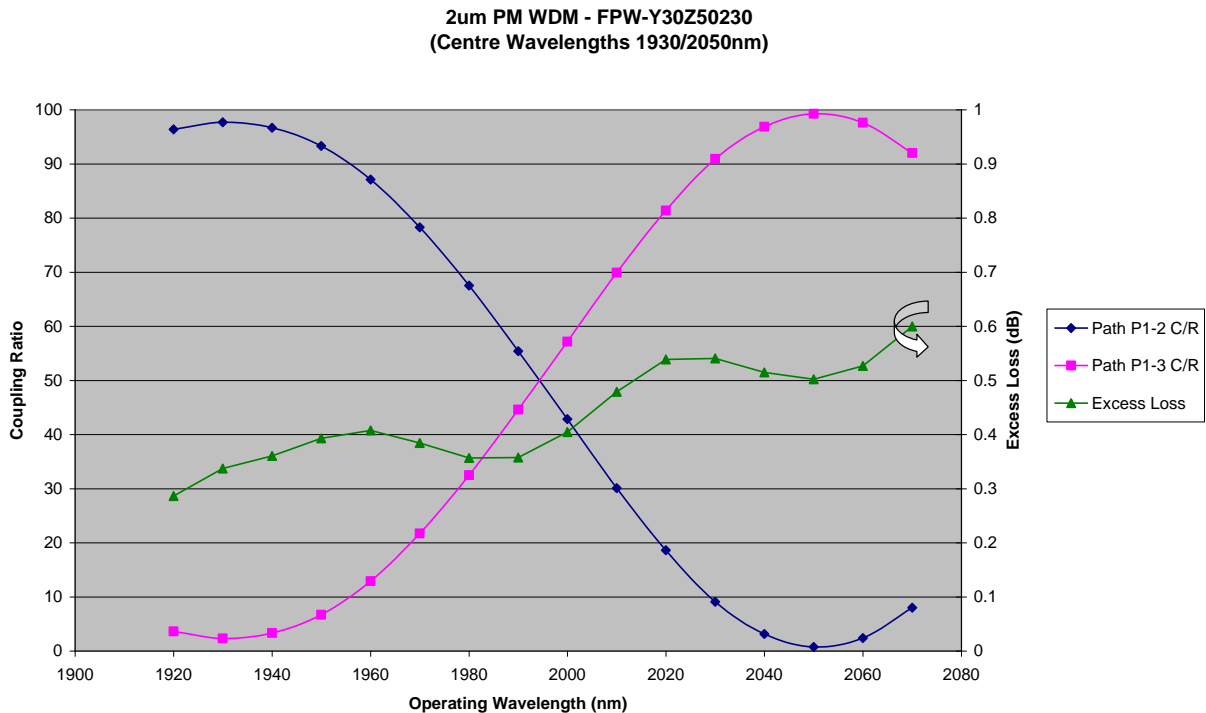

PM WDM FOR 2 µm OPERATION

Order code

Order codes are comprised of a standard device prefix (e.g. FPW) followed by code letters or numbers which correspond to available options.

Sample: FPW-Y40Z50230 (PM fused fiber WDM, 1940/2050 nm wavelengths, 2x2 port configuration regular housing, no connectors).

Order code

				①	②	③	④	⑤	⑥	⑦	⑧	⑨						
F	P	W	-															
①	Wavelength channel 1			7XX	8XX	9XX	10XX	11XX	12XX	13XX	14XX	15XX	16XX	17XX	18XX	19XX	20XX	
	Code			7	8	9	0	1	2	3	S	C	L	W	X	Y	Z	
②	Last two digits of channel 1			e.g. XX20			e.g. XX50			e.g. XX70			e.g. XX80					
③	center wavelength			Code			20			50			70			80		
④	Wavelength channel 2			19XX						20XX								
	Code			Y						Z								
⑤	Last two digits of channel 2			e.g. XX20			e.g. XX50			e.g. XX70			e.g. XX80					
⑥	center wavelength			Code			20			50			70			80		
⑦	Port configuration³			1x2						2x2								
	Code			1						2								
⑧	Housing³			Regular housing						High power			Regular high power					
	Code			3						7			C					
⑨	Connector^{1,4}			None						FC/APC-PM			FC/PC-PM					
	Code			0						P			R					

1 Insertion loss in specification table does not include connector losses.

2 Pigtail length 1 m (minimum). Further pigtail lengths available on request. Where connectorized, pigtail length is to the connector face.

3 7 and C not available in 1x2 port configuration. For more information contact G&H sales.

4 To request connectors please contact G&H sales.