



The ModBox-VNA-NIR1064nm-40GHz is a wide bandwidth Optical Transmitter designed to extend Vectorial Network Analyzers applications into the optical domain.

When associated with a Vectorial Network Analyzer, they make up a high performance and easy to use test equipment for photoreceivers or any high speed optoelectronic device characterization.

The ModBox-VNA-NIR1064nm-40GHz incorporates an 1064 nm low noise laser source and a modulation stage based on a wide bandwidth LiNbO₃ analog modulator with an automatic bias control circuit.

FEATURES

- Analog modulation up to 40 GHz
- Low RIN
- High harmonics suppression

APPLICATIONS

- Transmission system test
- Components characterization
- Receiver frequency test
- R&D laboratories

OPTIONS

- Multi lasers 976 nm, 920 nm, 1083 nm
- Multi-Channel

Performance Highlights

Parameter	Min	Typ	Max
Operating wavelength	980 nm	-	1150 nm
Embedded laser	-	1064 nm	-
Modulation formats	VNA, NRZ, PAM-4		
Frequency	-	-	40 GHz
Modulated output power	5 dBm	-	-


Ordering Information:



800 Village Walk #316
Guilford, CT 06437
Ph: 203-401-8093

Email orders to: sales@xsoptix.com
Fax orders to: 800-878-7282

Functional Block Diagram

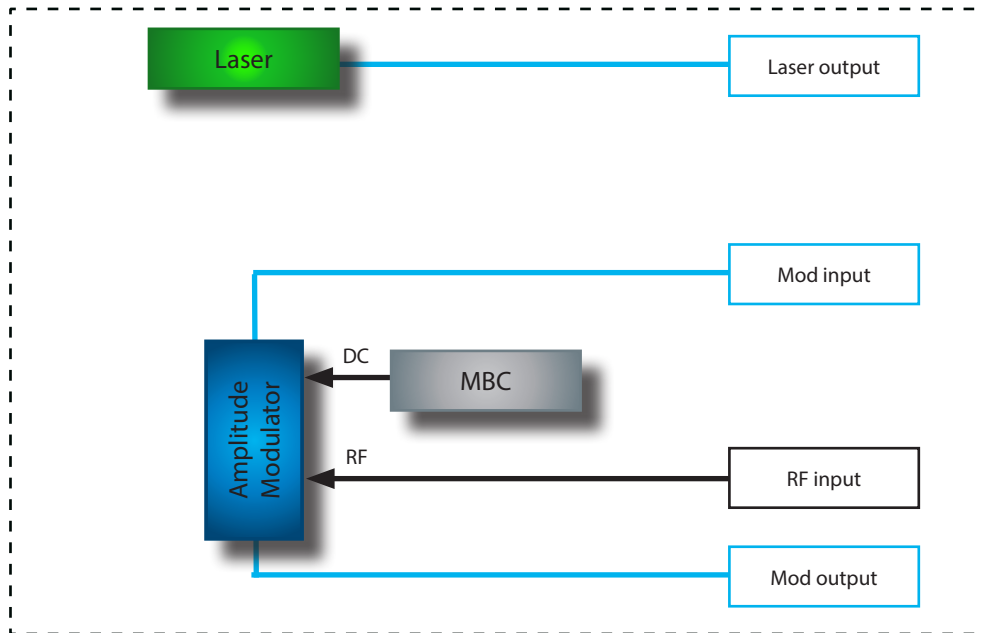

The ModBox-VNA-NIR1064nm-40GHz features:

- A chirp-free X-cut LiNbO₃ (Lithium Niobate) Mach-Zehnder modulator for very high linearity and very wide electro-optical bandwidth, it operates from 980 nm up to 1150 nm.
- A modulator bias controller. The internal LiNbO₃ modulator is a X-cut device with very low drift. However, an automatic bias control circuit is provided to lock the operating point of the modulator at the quadrature point in the linear portion of the modulator transfer curve. The MBC ensures a stable operation over time and shows a very low noise sensitivity yielding a significant reduction of the required dither voltage amplitude.
- An 1064 nm low RIN laser. Wavelength and power are tunable through the front panel controls or the ModBox software interface. Additional lasers can be embedded at centered wavelengths 976 nm, 920 nm, 1083 nm.

The ModBox-VNA-NIR1064nm-40GHz is controlled from the front panel thanks to the Smart interface touch screen. The Smart manual interface allows for bias control circuit and laser current settings. It comes also with a simple GUI solution, Windows based and implemented through the Ethernet interface.

Input Electrical Specifications User supplied, not a ModBox specification

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Input electrical termination	-	AC coupled	Single ended			-
Signal type	-	-	Analog / NRZ / PAM-4			-
Input voltage ⁽¹⁾	V_{IN}	VNA mode	0.4	0.6	1	Vpp
		NRZ mode	-	5.3	-	Vpp
		PAM-4 Mode	-	3.6	-	Vpp
Bandwidth	BW	-	-	-	40	GHz
Impedance matching	Z_{IN-RF}	-	-	50	-	Ω

(1): The ModBox-VNA-NIR1064nm-40GHz does not feature an internal RF amplifier. The VNA characterization is usually performed in a "small signal mode", therefore a RF amplifier is not necessary. Omitting the amplifier allows to obtain a smoother and flatter transfer function.

When a proper driver is plugged to the ModBox-VNA-NIR1064nm-40GHz an amplitude modulation is created, up to 44 Gb/s NRZ or up to 32 Gbauds PAM-4.

Input Optical Specifications User supplied, not a ModBox specification

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Operation	λ	CW	980	-	1150	nm
Polarization	-	-	Linear and controlled			-
Power	OP_{IN}	-	7	-	20	dBm

Output Optical Specifications Specifications below are given with embedded 1064 nm laser.

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Modulation Frequency	-	-	-	-	40	GHz
Wavelength	λ	-	-	1064	-	nm
Wavelength laser tuning range	$\Delta\lambda$	Diode chip temperature control	-	0.8	1	nm
Modulated output power	OP_{OUT}	With embedded laser	5	6	-	dBm
Optical output power adjustment	ΔOP_{OUT}	Diode Injection current control	0	-	100	%
Optical output power stability	δOP_{OUT}	Over 12 hours	-	-	1	%rms
Spectrum linewidth	$\delta\lambda$	FWHM	-	3	15	MHz
Relative Intensity Noise	RIN	16 dBm	-	-	-163	dB/Hz
Optical return loss	ORL	-	-40	-	-	dB
Electrical return loss	ERL	-	-	-12	-10	dB

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
RF input power	EP_{in}	-	28	dBm
Optical input power	OP_{in}	-	25	dBm

Interfaces, Dimensions and Compliance

Interfaces	
Optical connectors and fibers	FC/APC - Polarization maintaining fiber, Corning PM 98-U25D
Electrical connector	V female (1.85 mm)
Control	Embedded Interface (front panel touchscreen) + Remote control (Ethernet)
Power supply	100-120V/220-240 automatic switch 50-60Hz (Rear panel)
EMC / Optical norms	EN61326-1 Ed. 2006 / EN 60625-1
Dimensions / Weight	Rack 19" x 2U, Depth=495mm / 5 kg



Ordering information

ModBox-VNA-NIR1064nm-40GHz

VNA = Optical Vectorial Network Analyser extension
 NIR1064nm = operation in the NIR1064nm band with a 1064 nm embedded by default
 40GHz = Analog Modulation up to 40 GHz

About us

ixblue Photonics produces specialty optical fibers and Bragg gratings based fiber optics components and provides optical modulation solutions based on the company lithium niobate (LiNbO₃) modulators and RF electronic modules.

ixblue Photonics serves a wide range of industries: sensing and instruments, defense, telecommunications, space and fiber lasers as well as research laboratories all over the world.