

# FAST FIBER OPTIC 1x2 SWITCH

## OVERVIEW

The SW fiber optic switch is a very fast opto-mechanical switch based on the MEMS technology. The component is designed for fast switching between two single mode fiber ports. The switch is available in 1x1, 2x1, 4x1, 8x1 and 2x2 variants. The highly reliable switching mechanism uses an integrated micromirror and features below 1 ms switching time and only 0.5 dB insertion loss.

The miniature package withstands rugged environments and is well suited for direct mounting on printed circuit boards. The switch is qualified according to Telcordia GR 1221.

## APPLICATIONS

- Optical Reconfiguration
- Protection Switching
- Network Restoration

## FEATURES

- reliable
- 0.5 dB insertion loss
- 1 ms response time
- 60 dB crosstalk
- miniature size
- non-latching

## ORDERING INFORMATION

SW1x2-9N

**Contact:**  
Sercalo microtechnology ltd  
Landstrasse 151, 9494 Schaan  
Principality of Liechtenstein  
Tel. +423 237 57 97 Fax. +423 237 57 48  
[www.sercalo.com](http://www.sercalo.com)  
e-mail: [info@sercalo.com](mailto:info@sercalo.com)

## DESCRIPTION

The non-latching switch modules are fast and reliable switches designed for single mode fiber instrumentation. The device is based on the latest silicon MEMS technology and uses a micro-mechanical mirror to switch light. Operated by an electrostatic actuator, the switch features fast switching below 1 ms and high crosstalk attenuation above 50 dB. The switch is powered by a 5 V supply voltage. A 5 V TTL or CMOS drive signal is used to control the switching state.


With 0 V on the drive pin (No 2) the switch is in its bar state (port 1 – port 3). When 5 V are applied to the drive pin, the micromirror is moved out of the optical path, which puts the switch into its cross state (port 1 – port 4). At power off, i.e. when either the supply voltage or the drive signal falls to 0 V, the switch returns into its bar state.

### TECHNICAL SPECIFICATIONS

	Unit	Min	Typ	Max
<b>Switch</b>				
Wavelength Range	nm	1240		1640
Insertion Loss	dB		0.5	0.9
Crosstalk	dB		75	50
Backreflection	dB		55	50
Polarisation Dependent Loss	dB		0.04	0.10
Switching Time	ms		0.5	1
Switching Voltage	V			5
Fiber Pigtail	µm		9/125/900	
Durability	cycles		no wear out	
<b>Package</b>				
Power Consumption	mW		5	
Operation Temperature	°C	0		70
Storage Temperature	°C	-40		85
Size (L x W x H)	mm		45 x 24 x 9.5	

### PIN CONNECTIONS

- 1 Supply 5V
- 2 Drive Signal 5V TTL
- 3 Ground 0V

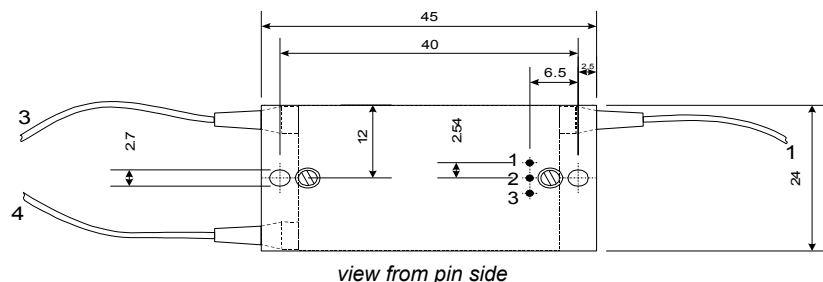

### ORDERING INFORMATION

SW2x1-9N

#### Contact:

Sercalo microtechnology ltd  
 Landstrasse 151, 9494 Schaan  
 Principality of Liechtenstein  
 Tel. +423 237 57 97 Fax. +423 237 57 48  
 www.sercalo.com e-mail: info@sercalo.com

**Sercalo**

MICROTECHNOLOGY LTD