

## MODULATOR

# MXIQ-LN-30

## 1550 nm wide bandwidth IQ Modulator

The Exail MXIQ-LN-30 is a wide bandwidth, low insertion loss Dual Parallel Mach-Zehnder Modulator. iXblue proprietary "Magic Junction" (patent n° US2008193077) confers it an unmatched low insertion loss, and its X-cut design guarantees high stability and zero chirp in a wide range of operational conditions.

The Exail MXIQ-LN-30 modulator is a key device dedicated to complex modulation scheme such as QPSK, QAM and OFDM up to 56 Gbaud.



### Features

- Wide bandwidth
- X-cut for high stability
- Low insertion loss

### Applications

- QPSK, QAM, OFDM

### Related Equipments

- Analog driver DR-AN-HO
- MBC-IQ Automatic Bias Controller
- ModBox-IQ

### MXIQ-LN-30 Performance Highlights

| Parameter                 | Min  | Typ  | Max  | Unit |
|---------------------------|------|------|------|------|
| Operating wavelength      | 1530 | 1550 | 1580 | nm   |
| Insertion loss            | -    | 5    | 7    | dB   |
| Electro-optical bandwidth | 20   | 25   | -    | GHz  |
| Usable EO bandwidth       | 30   | 40   | -    | GHz  |

Specifications given at 25 °C, 1550 nm

#### Ordering Information:



800 Village Walk #316  
Guilford, CT 06437  
Ph: 203-401-8093

Email orders to: [sales@xsoptix.com](mailto:sales@xsoptix.com)  
Fax orders to: 800-878-7282

# MXIQ-LN-30

## Electrical Characteristics

| Parameter                              | Symbol                  | Condition                                    | Min | Typ | Max  | Unit       |
|--|-------------------------|--|-----|-----|------|------------|
| Electro-optical bandwidth              | $S_{21}$                | RF electrodes, from 2 GHz                    | 20  | 25  | -    | GHz        |
| Usable EO bandwidth                    | $S_{21}$                | -  | 30  | 40  | -    | GHz        |
| Ripple $S_{21}$                        | $\Delta S_{21}$         | RF electrodes                                | -   | 0.5 | 1    | dB         |
| Electrical return loss                 | $S_{11}$                | RF electrodes, 0 - 20 GHz                    | -   | -12 | -10  | dB         |
| $V_{\pi}$ RF @50 kHz                   | $V_{\pi_{RF\ 50\ kHz}}$ | RF <sub>1</sub> & RF <sub>2</sub> electrodes | -   | 5   | 6    | V          |
| $V_{\pi}$ DC <sub>1,2</sub> electrodes | $V_{\pi_{DC\ 1,2}}$     | DC <sub>1</sub> & DC <sub>2</sub> electrodes | -   | 6   | 7    | V          |
| $V_{\pi}$ DC <sub>3</sub> electrodes   | $V_{\pi_{DC\ 3}}$       | DC <sub>3</sub> electrodes                   | -   | 9.5 | 10.5 | V          |
| Impedance matching                     | $Z_{in-RF}$             | -  | -   | 50  | -    | $\Omega$   |
| DC input impedance                     | $Z_{in-DC}$             | -  | 1   | -   | -    | M $\Omega$ |

## Optical Characteristics

| Parameter            | Symbol    | Condition                                 | Min                          | Typ  | Max  | Unit |
|----------------------|-----------|---|------------------------------|------|------|------|
| Crystal              | -         | -   | Lithium Niobate X-Cut Y-Prop |      |      |      |
| Operating wavelength | $\lambda$ | -   | 1530                         | 1550 | 1580 | nm   |
| Insertion loss       | IL        | Without optical connectors <sup>(1)</sup> | -                            | 5    | 7    | dB   |
| Optical return loss  | ORL       | -   | -40                          | -45  | +40  | dB   |
| Chirp                | $\alpha$  | -   | -0.1                         | 0    | +0.1 | -    |

All specifications given at 25 °C, 1550 nm, unless differently specified.

<sup>(1)</sup> Consider an extra-loss up to 0.25 dB for each FC/APC optical connector


## Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.


| Parameter             | Symbol     | Min | Max | Unit |
|-----------------------|------------|-----|-----|------|
| RF input power        | $EP_{in}$  | -   | 28  | dBm  |
| Bias Voltage          | $V_{bias}$ | -20 | +20 | V    |
| Optical input power   | $OP_{in}$  | -   | 20  | dBm  |
| Operating temperature | OT         | 0   | +70 | °C   |
| Storage temperature   | ST         | -40 | +85 | °C   |

# MXIQ-LN-30

Typical Curve  $S_{21}$  &  $S_{11}$  from RF<sub>1</sub> Electrode

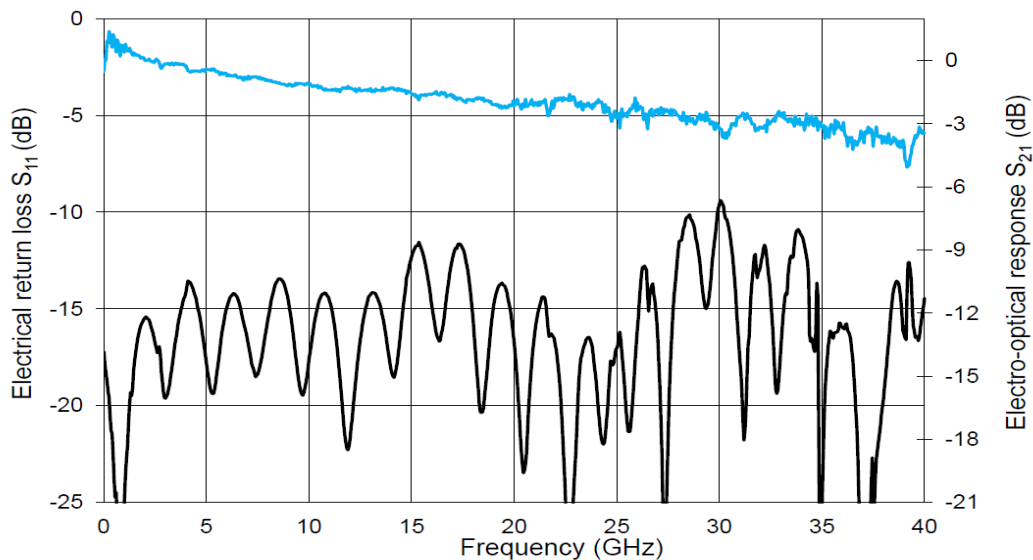


Typical Curve  $S_{21}$  &  $S_{11}$  from RF<sub>2</sub> Electrode

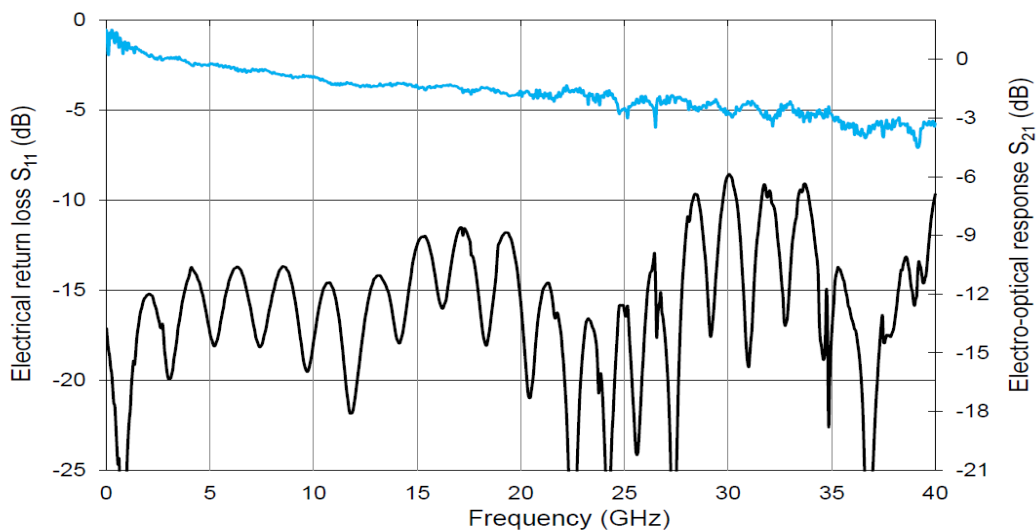

# MODULATOR | MXIQ-LN-30 | 4/4


## Mechanical Diagram and Pinout

All measurements in mm

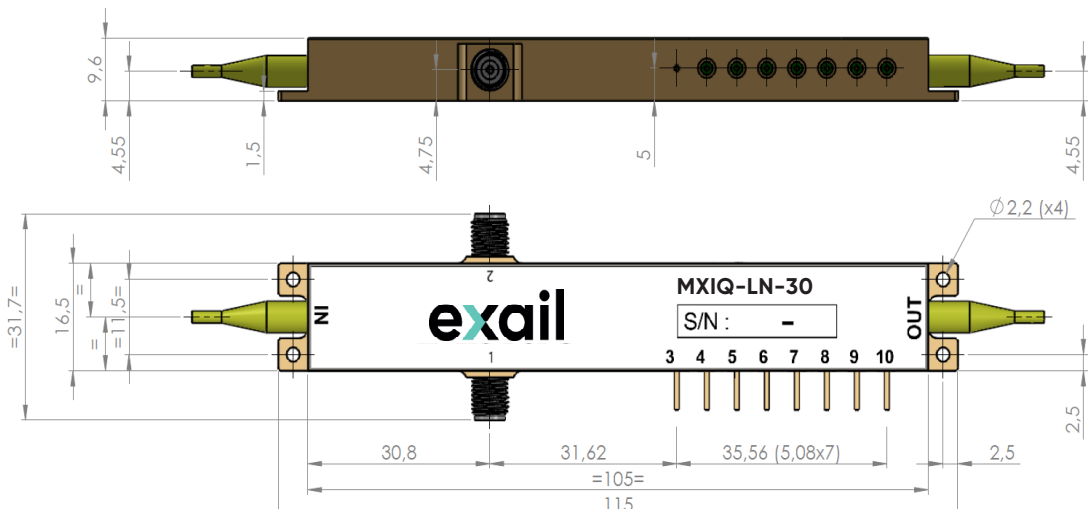

| Port    | Function                        | Note   |
|---------|---------------------------------|--|
| IN      | Optical input port              | Polarization maintaining fiber<br>Corning PM 15-U25D Length: 1.5 meter, buffer diameter: 900 $\mu$ m |
| OUT     | Optical output port             | Polarization maintaining fiber<br>Corning PM 15-U25D Length: 1.5 meter, buffer diameter: 900 $\mu$ m |
| 1, 2    | RF1 input port / RF2 input port | Female K (SMA compatible)  |
| 3       | Ground                          | Pin feed through diameter 1.0 mm   |
| 4, 5, 6 | DC2 / DC1 / DC3                 | Pin feed through diameter 1.0 mm   |
| 7, 8    | Photodiode 1 anode / cathode    | Pin feed through diameter 1.0 mm   |
| 9, 10   | Photodiode 2 cathode / anode    | Pin feed through diameter 1.0 mm   |

## Ordering information

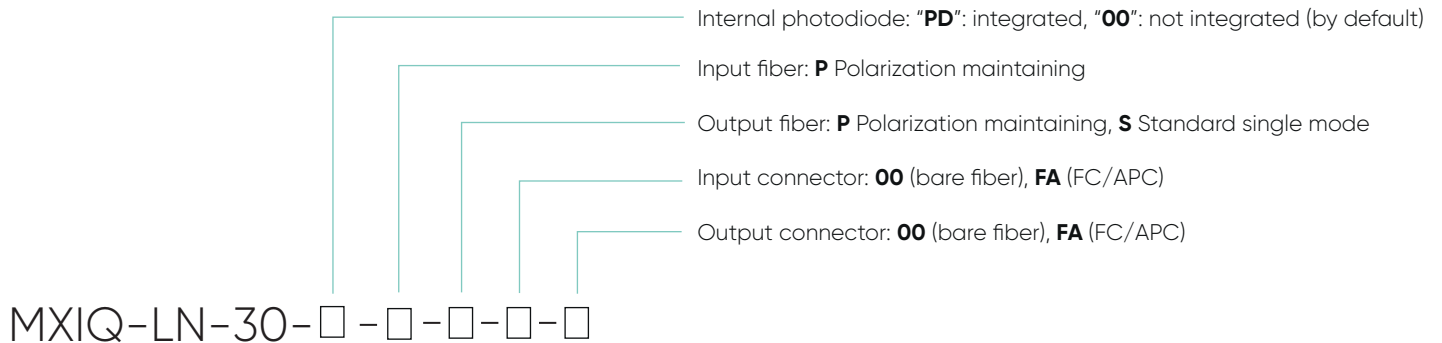

Exail reserves the right to change, at any time and without notice, the specifications, design, function or form of its products described herein.

contact.photonics@exail.com | www.exail.com  
Europe +33 1 30 08 87 43 | Americas +1 508 745 3487 | APAC +65 6747 4912

