

MODULATOR

MXIQER-LN-30

1550 nm band Very High Extinction Ratio IQ Modulator

The MXIQER-LN-30 optical IQ modulator is a wide bandwidth, low insertion loss and high extinction ratio Dual Parallel Mach-Zehnder Modulator. Exail proprietary "Magic Junction" (patent n° US2008193077) confers it an unmatched low insertion loss with high optical extinction ratio, and its X-cut design guarantees high stability and zero chirp in a wide range of operational conditions.

The MXIQER modulator is key device in all applications where a combination of high extinction and wide bandwidth is required, such as Single Side Band optical signal generation with high suppression ratio of main carrier and one side band.



Features

- Superior extinction ratio
- High bandwidth
- X-cut for high stability
- Low insertion loss

Applications

- Single Side Band
- QPSK, QAM, OFDM

Related Equipments


- Analog driver DR-AN
- MBC-IQ Automatic Bias Controller
- ModBox-CS-SSB

MXIQER-LN-30 Performance Highlights

Parameter	Min	Typ	Max	Unit
Operating wavelength	1530	1550	1580	nm
Insertion loss	-	5	7	dB
Carrier attenuation	32	40	-	dB
Side-Band attenuation	32	40	-	dB
Electro-optical bandwidth	20	25	-	GHz
Usable electro-optical bandwidth	30	40	-	GHz

Specifications given at 25 °C, 1550 nm

Optical CS-SSB modulation with carrier and subcarrier suppressions

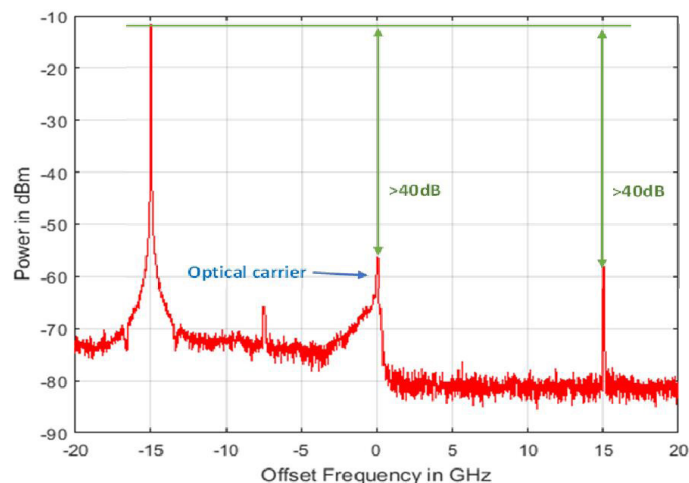

Ordering Information:



800 Village Walk #316
Guilford, CT 06437
Ph: 203-401-8093

Email orders to: sales@xsoptix.com
Fax orders to: 800-878-7282

MXIQER-LN-30

Electrical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Electro-optical bandwidth	S_{21}	RF electrodes, from 2 GHz	20	25	-	GHz
Usable EO bandwidth	S_{21}	-	30	40	-	GHz
Ripple S_{21}	ΔS_{21}	RF electrodes	-	0.5	1	dB
Electrical return loss	S_{11}	RF electrodes, 0 - 20 GHz	-	-12	-10	dB
V_{π} RF @50 kHz	$V_{\pi_{RF\ 50\ kHz}}$	RF1 & RF2 electrodes	-	5	6	V
V_{π} DC _{1,2} electrodes	$V_{\pi_{DC\ 1,2}}$	DC1 & DC2 electrodes	-	6	7	V
V_{π} DC ₃ electrodes	$V_{\pi_{DC\ 3}}$	DC3 electrodes	-	9.5	10.5	V
V_{π} DC ₃ CS-SSB	$V_{\pi_{DC\ 3\ CS-SSB}}$	DC3 biasing for CS-SSB	-	4.5	6	V
Impedance matching	Z_{in-RF}	-	-	50	-	Ω
DC input impedance	Z_{in-DC}	-	1	-	-	M Ω

Optical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Crystal	-	-	Lithium Niobate X-Cut Y-Prop			
Operating wavelength	λ	-	1530	1550	1580	nm
Insertion loss	IL	Without optical connectors ⁽¹⁾	-	5	7	dB
Carrier attenuation	C-SER	Measured at 1550 nm and 15 GHz	32	40	-	dB
Side-Band attenuation	SB-SER	Measured at 1550 nm and 15 GHz	32	40	-	dB
Optical return loss	ORL	-	-40	-45	+40	dB
Chirp	α	-	-0.1	0	+0.1	-

All specifications given at 25 °C, 1550 nm, unless differently specified.

⁽¹⁾ Consider an extra-loss up to 0.25 dB for each FC/APC optical connector


Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.


Parameter	Symbol	Min	Max	Unit
RF input power	EP_{in}	-	28	dBm
Bias Voltage	V_{bias}	-20	+20	V
Optical input power	OP_{in}	-	20	dBm
Operating temperature	OT	0	+70	°C
Storage temperature	ST	-40	+85	°C

MXIQER-LN-30


Typical Curve S_{21} & S_{11} from RF₁ Electrode

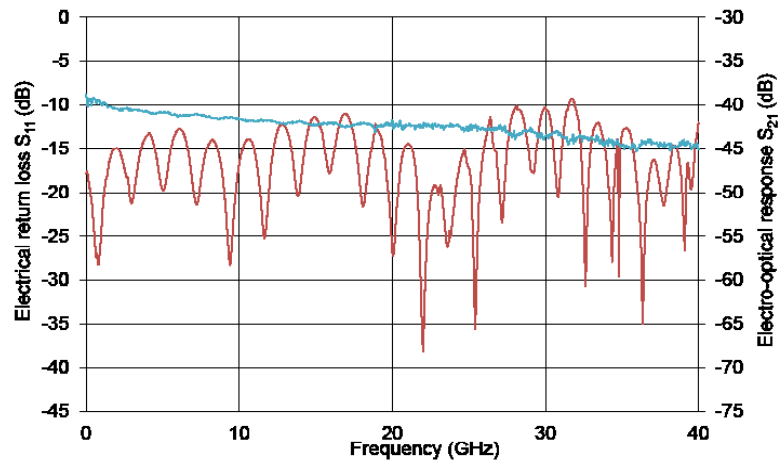

Typical Curve S_{21} & S_{11} from RF₂ Electrode

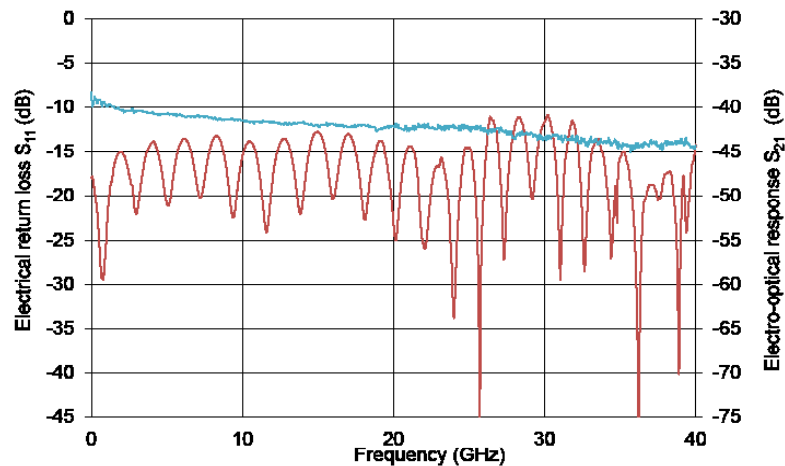


Optical CS-SSB modulation with carrier and subcarrier (modulation @15 GHz) suppressions

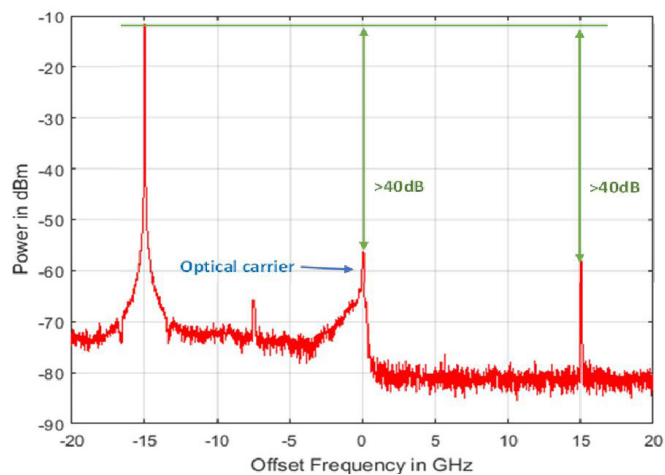

MODULATOR | MXIQER-LN-30 | 4/4

Mechanical Diagram and Pinout

All measurements in mm

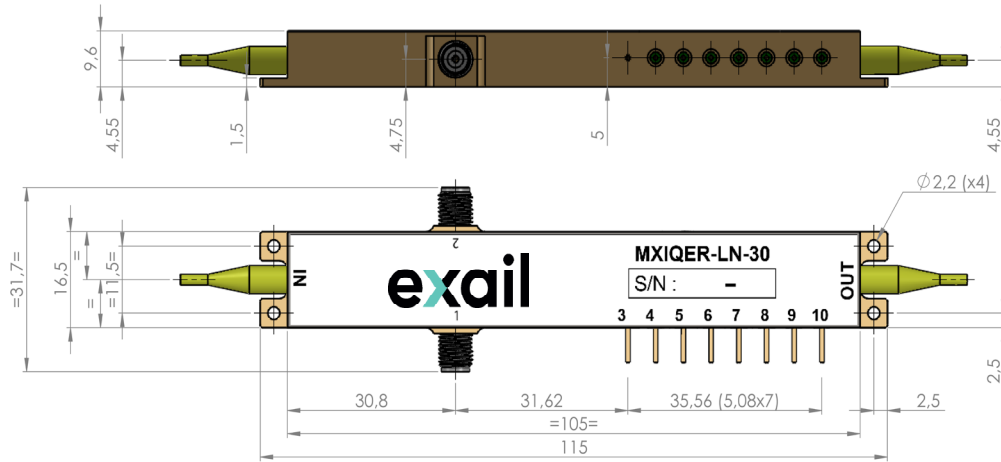

Port	Function	Note
IN	Optical input port	Polarization maintaining fiber Corning PM 15-U25D Length: 1.5 meter, buffer diameter: 900 μ m
OUT	Optical output port	Polarization maintaining fiber Corning PM 15-U25D Length: 1.5 meter, buffer diameter: 900 μ m
1, 2	RF1 input port / RF2 input port	Female K (SMA comptatible)
3	Ground	Pin feed through diameter 1.0 mm
4, 5, 6	DC2 / DC1 / DC3	Pin feed through diameter 1.0 mm
7, 8	Photodiode 1 anode / cathode	Pin feed through diameter 1.0 mm
9, 10	Photodiode 2 cathode / anode	Pin feed through diameter 1.0 mm

Ordering information

- Internal photodiode: **"PD"**: integrated, **"00"**: not integrated (by default)
- Input fiber: **P** Polarization maintaining
- Output fiber: **P** Polarization maintaining, **S** Standard single mode
- Input connector: **00** (bare fiber), **FA** (FC/APC)
- Output connector: **00** (bare fiber), **FA** (FC/APC)

MXIQER-LN-30- □ -□-□-□-□

04_2024_ED8 / 00023625-D

Exail reserves the right to change, at any time and without notice, the specifications, design, function or form of its products described herein.

contact.photonics@exail.com | www.exail.com
 Europe +33 1 30 08 87 43 | Americas +1 508 745 3487 | APAC +65 6747 4912

