

# HIGH RELIABILITY FUSED COUPLER C OR L BAND

## Fused Fiber Coupler

---

High Reliability (HI REL) Components are deployed in environments such as undersea and space, where the costs of component replacement are prohibitive.

G&H is established as a supplier of these components to major undersea equipment manufacturers.

G&H's HI REL capability is built upon the foundation of a long established history of manufacturing very reliable terrestrial components. Full facilities are available to carry out customer-specific HI REL qualification programs, which can consist of accelerated ageing and Weibull analysis.

Manufacturing is carried out on specially-developed workstations. Advanced fiber management, in-process screening and customer-specific validation tests are implemented, to further enhance component reliability.

Component types available include fused fiber couplers, tap couplers and wavelength division multiplexers. The ultra-low loss of G&H fused fiber components helps to promote low noise figure and improved system margin in undersea transmission systems.

Components are supplied in regular (bare fiber) or custom housings, depending on the installation environment.

Please contact us to discuss your specific requirements.



### Key Features

- Established HI REL supplier
- High performance
- Full qualification facilities available
- Advanced in-process testing
- Ultra-low loss fused components
- Choice of housings
- Design standard 0.1FITs (failure in one billion field hours)

### Applications

- Undersea equipment
- Terminal equipment
- Space
- Defense and avionic

### Compliance

- Customer specific

## Optical Specifications

Coupling Ratio	Grade	Signal Path					Tap Path				
		Insertion Loss <sup>1,2</sup> (dB)		WDL <sup>3</sup> (dB)	PDL <sup>4</sup> (dB)	TDL <sup>5</sup> (dB)	Insertion Loss <sup>1,2</sup> (dB)		WDL <sup>3</sup> (dB)	PDL <sup>4</sup> (dB)	TDL <sup>5</sup> (dB)
Example <sup>6</sup>		Min	Max	Max	Max	Max	Min	Max	Max	Max	Max
2%	H		0.30	0.05	0.05	0.02	15.8	18.5	0.40	0.20	0.15
5%	H		0.40	0.05	0.05	0.08	11.9	14.4	0.20	0.20	0.15
10%	H		0.70	0.06	0.06	0.08	9.2	11.2	0.18	0.15	0.13
50%	H	2.7	3.40	0.20	0.12	0.16	2.7	3.4	0.20	0.12	0.16

1 Insertion loss over operating wavelength range and component life – not including PDL, TDL (25 years, typical service/storage conditions 40°C/60% RH).

2 In 2x2 couplers insertion loss is not specified for launch through second input port P4 (coloured blue)

3 Change in insertion loss over the operating wavelength range

4 Change in insertion loss over all input polarisation states at band centre wavelength

5 Change in insertion loss from -5 – +75°C. Guaranteed by design.

6 Any coupling ratio available – contact Gooch & Housego for specification of coupling ratios not listed.

Parameter	Specification	
Operating wavelength range	C band	1528-1563 nm
	L band	1570-1605 nm
	1310 band	1295-1325 nm
	1480 band	1465-1495 nm
Return loss/directivity <sup>1</sup>	55 dB	
Pigtail tensile load <sup>2</sup>	5 N	
Optical power handling	4 W	
Environmental qualification	Component design to 0.1FIT Failures in 10 <sup>9</sup> hours	


1 Return loss is the ratio of power launched to power reflected for port P1. Directivity for the 2x2 component is the ratio of power launched to P1 to the power reflected to P4. Guaranteed by design.

2 Stripped fiber proof tested on rig to confirm strength.

## Housing Option

Housing Code	Description	Dimensions (mm)	Pigtail
3	Regular	3.0 (Ø) x 50 (L)	Primary-coated fiber

## Configuration

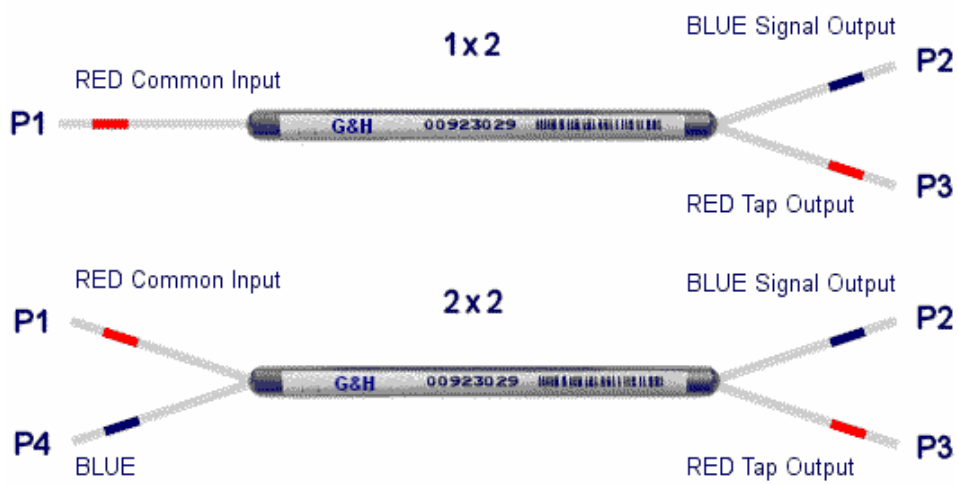

## Order code

Order codes are comprised of a standard device prefix (e.g. FFC) followed by code letters or numbers, which correspond to available options.

**Sample:** FFC-C231HB110 (C Band, 2% tap, regular housing, 1x2, HI REL grade, SMF-28e+ photonic fiber, 1 m pigtail, no connector).

Order code				①	②	③	④	⑤	⑥	⑦	⑧	⑨
F	F	C	-					H	B	1		0
①	Pump wavelength			C band		L band		1310 nm band		1480 nm band		
	Code			C		L		4		3		
②	Coupling ratio <sup>2</sup>			2%		5%		10%		50%		
	Code			2		5		A		K		
③	Housing			Regular								
	Code			3								
④	Port configuration			1x2				2x2				
	Code			1				2				
⑤	Grade			HI REL								
	Code			H								
⑦	Fiber type			Corning SMF-28								
	Code			1								
⑧	Pigtail length <sup>1</sup>			0.5 m		1 m		2 m		3 m		4 m
	Code			0		1		2		3		4
⑨	Connectors			No connectors								
	Code			0								

1 Minimum pigtail length. Further pigtail lengths available on request.

2 Any coupling ratio available – contact G&H for specification and ordering codes of coupling ratios not listed.

**Ordering Information:**



800 Village Walk #316  
 Guilford, CT 06437  
 Ph: 203-401-8093

Email orders to: [sales@xsoptix.com](mailto:sales@xsoptix.com)  
 Fax orders to: 800-878-7282