



The ModBox-VNA-CBand is a C-Band and wide bandwidth Optical Transmitter designed to extend Vectorial Network Analyzers applications into the optical domain.

When associated with a Vectorial Network Analyzer, they make up a high performance and easy to use test equipment for the characterization of photoreceivers or any high speed optoelectronic device.

The ModBox-VNA-CBand incorporates a 1550 nm low RIN laser source and a modulation stage based on a wide bandwidth LiNbO<sub>3</sub> modulator with an automatic bias control circuit.

#### FEATURES

- Analog modulation up to 40GHz, 70GHz
- Dither-free bias controller
- Low RIN
- High harmonics suppression

#### APPLICATIONS

- Transmission system test
- Components characterization
- Receiver frequency test
- R&D laboratories

#### OPTIONS

- 850 nm, 1310 nm & 1550 nm, O-band
- Multi-Channel

#### Performance Highlights

Parameter	Min	Typ	Max
Operating wavelength	-	1550 nm	-
Modulation format	Analog Modulations		
Modulation bandwidth	-	-	40 GHz, 70 GHz
Modulated optical output power	6 dBm	-	-


#### Ordering Information:



800 Village Walk #316  
Guilford, CT 06437  
Ph: 203-401-8093

Email orders to: [sales@xsoptix.com](mailto:sales@xsoptix.com)  
Fax orders to: 800-878-7282

## Functional Block Diagram

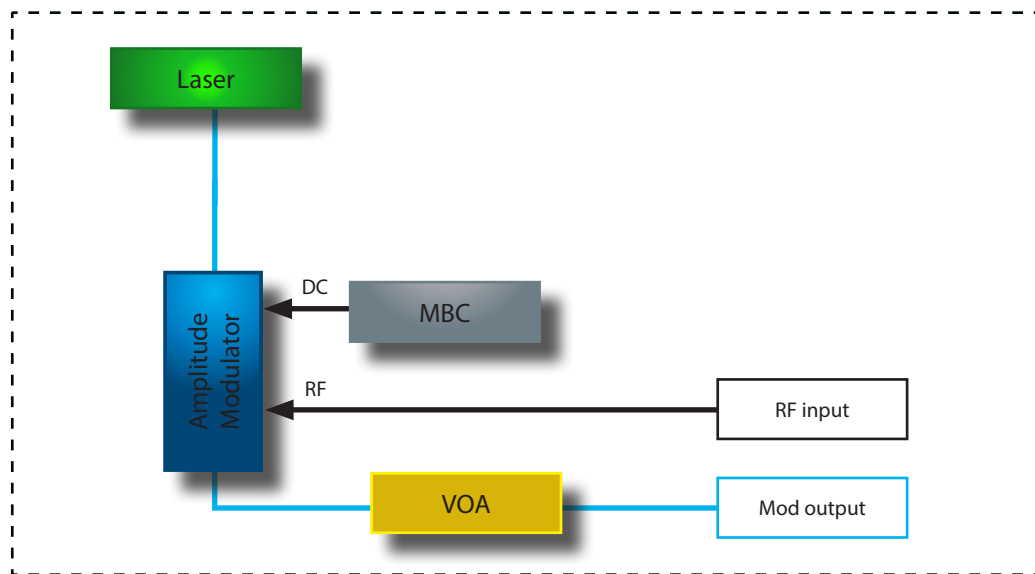

## The ModBox-VNA-CBand features:

- A chirp-free X-cut LiNbO<sub>3</sub> (Lithium Niobate) Mach-Zehnder Analog Intensity modulator. It is selected for its high electro-optic bandwidth and flat, low ripple, electrooptic response curve.
- A modulator bias controller. The internal LiNbO<sub>3</sub> modulator is a X-cut device with very low drift. However an automatic bias control circuit is provided to lock the operating point of the modulator at the quadrature point whatever the environmental conditions. The bias control circuit is dither free and therefore does not add any spurious content to the small signal modulation generated by the VNA. It is pre-set for operation in quadrature, in the linear portion of the modulator transfer curve.
- A 1550 nm low RIN laser directly spliced to the modulator. Wavelength and power of such embedded laser are tunable through the front panel controls or the ModBox software interface.
- A Variable Optical Attenuator (VOA) to precisely control the modulated optical output signal.

The ModBox-VNA-CBand is controlled from the front panel thanks to the Smart interface touch screen. The Smart manual interface allows for bias control circuit and laser settings. It comes also with a simple GUI solution, Windows based and implemented through the Ethernet interface.

### Input Electrical Specifications User supplied, not a ModBox specification

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Input electrical termination	-	AC coupled	Single ended			-
Signal type	-	-	Analog			-
Input voltage <sup>(1)</sup>	$V_{IN}$	Amplitude Modulation	0.4	0.6	1	Vpp
Bandwidth	BW	ModBox-VNA-CBand-40GHz	-	-	40	GHz
		ModBox-VNA-CBand-70GHz	-	-	70	GHz
Impedance matching	$Z_{IN-RF}$	-	-	50	-	$\Omega$

(1): The ModBox-VNA-CBand does NOT feature an internal RF amplifier. The VNA characterization is usually performed in a "small signal mode", therefore a RF amplifier is not necessary. Omitting the amplifier allows to obtain a smoother and flatter transfer function.

### Output Specifications

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Modulation bandwidth	-	ModBox-VNA-CBand-40GHz	-	-	40	GHz
		ModBox-VNA-CBand-70GHz	-	-	70	GHz
Wavelength	$\lambda$	From embedded laser diode	1550 nm			-
Wavelength laser tuning range	-	From embedded laser diode	-	0.8	1	nm
Maximum modulated output power	$OP_{OUT}$	1550 nm	2	-	-	dBm
Maximum modulated output power	HOP	ModBox-VNA-CBand-40GHz	5	6	-	dBm
Optical output power range adjustment	$\Delta OP_{OUT}$	By the use of the VOA	-40	-	0	dB
Optical output power stability	$\delta OP_{OUT}$	Over 12 hours	-	-	1	%rms
Spectrum linewidth	$\Delta\lambda$	1550 nm	-	3	15	MHz
Relative Intensity Noise	RIN	-	-	-	-155	dB/Hz
Optical return loss	ORL	-	-45	-50	-	dB
Electrical return loss	ERL	-	-	-12	-10	dB

### Tunable C-Band Laser Specifications Option

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Wavelengths laser tuning range	$\lambda$	-	1527.60	-	1565.50	nm
Modulated output power	OP	-	1	-	-	dBm
Optical output power adjustment	-	Diode Injection current control	25	-	100	%
Spectrum linewidth	$\Delta\lambda$	FWHM, instantaneous	-	100	-	kHz
Relative Intensity Noise	RIN	-	-	-	-145	dB/Hz

### Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
RF input power	EP <sub>in</sub>	-	28	dBm

### Interfaces, Dimensions and Compliance

Interfaces	
Optical connectors and fibers	(FC-SC)/(APC-UPC) - Polarization maintaining fiber Corning PM15-U25D
Electrical connector	ModBox-VNA-CBand-40GHz V female (1.85 mm)
	ModBox-VNA-CBand-70GHz V female (1.85 mm)
Control	Embedded Interface (front panel touchscreen) + Remote control (Ethernet)
Power supply	100-120V/220-240 automatic switch 50-60Hz (Rear panel)
EMC / Optical norms	EN61326-1 Ed. 2006 / EN 60625-1
Dimensions / Weight	Rack 19" x 2U, Depth=495mm / 5 kg



### Ordering information

#### ModBox-VNA-CBand-XXGHz-YY

VNA = Optical Vectorial Network Analyser extension

CBand = Embeds laser, 1550 nm by default

XX = Analog Modulation bandwidth: 40GHz up to 40 GHz - 70 GHz up to 70 GHz

YY = Output connectors, FA : FC/APC - FC : FC/UPC - SC : SC/UPC - SA : SC/APC

#### Opt-CTun

C-Band Tunable Laser option

### About us

ixblue Photonics produces specialty optical fibers and Bragg gratings based fiber optics components and provides optical modulation solutions based on the company lithium niobate (LiNbO<sub>3</sub>) modulators and RF electronic modules.

ixblue Photonics serves a wide range of industries: sensing and instruments, defense, telecommunications, space and fiber lasers as well as research laboratories all over the world.