

Selection Guide

Ordering Information:



800 Village Walk #316  
Guilford, CT 06437  
Ph: 203-401-8093

Email orders to: [sales@xsoptix.com](mailto:sales@xsoptix.com)  
Fax orders to: 800-878-7282

VIAMI

VIAMI Solutions

# VIAMI

## MAP-Series Selection Guide



The VIAMI Multiple Application Platform (MAP) is an optical test and measurement platform optimized for cost-effective development and manufacturing of optical transmission techniques. The MAP chassis are the foundation to our entire portfolio of modules, enabling scalability and efficiency for manufacturing optical network elements. The cassettes are the building blocks and fall into two different families, the light test turn-key solutions and the light direct configurable solutions to meet each customer's exact needs.

The MAP series is the first photonic layer lab and manufacturing platform that complies with LAN Extensions for Instrumentation (LXI) by conforming to the required physical attributes, Ethernet connectivity, and interchangeable virtual instrument (IVI) drivers, which are intuitive and optimized for ease of use with popular Application Development Environments such as LabVIEW, Visual C++, Visual Basic, and LabWindows™.

The LightDirect™ family offers a wide range of foundational optical test modules that are used in simple bench test applications, or combined in larger, multi-modules customer driven automated test systems. These modules are characterized by their simple control interface and single function nature. Individually or together, they form the foundation of most optical test applications. VIAVI offers many modules, such as light sources, polarization scramblers, power meters, attenuators, switches, and spectrum analyzers.

## Optical Sources and Amplifiers



### Tunable Distributed Bragg Reflector Laser Sources

**mTLG-C3** is a next-generation tunable laser that is ideal for DWDM testing that requires changing the wavelength on demand over the C- and L-band with 50 GHz spacing. Available in single, dual or quad configurations. The C-band is available in a high power variant.




### Board-band laser source

**mBBS-C1** is a broadband source that provides 100mW of amplified spontaneous emission (ASE) output for stable and spectrally flattened C- and L-band sources. The source provides high spectral stability better than 0.02 dB.



### General-Purpose light Source

**mSRC-C2** is a general-purpose light source in these key fixed telecom wavelength bands: 850, 1300, 1310, 1490, 1510, 1550, 1610, 1625 and 1653 nm. Available in three different emitter configurations, Fabry Perot (FP lasers), low power LEDs, Super Luminescent Diode (SLED) and Distributed Feedback (DFB) in multimode or single mode formats.

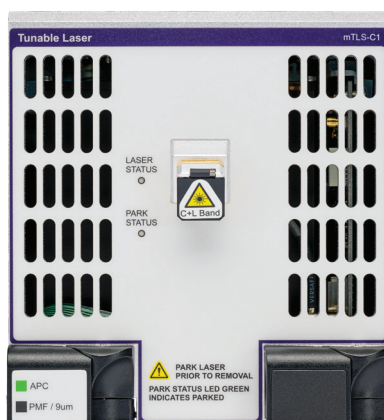

### Continuously Tunable

**Laser Source mTLS-C1** is a C and L-band continuously tunable high-power laser source for general purpose applications across DWDM, optical amplifier and silicon photonic test applications. **Available soon**, extended C and L-band source.



### Erbium Doped Fiber Amplifier


**mEDFA-C1** is available in six configurations: Extended C-band pre-amplifier, dual pre-amplifier, booster, DWDM booster and maximum power and L-band booster. Features a low-noise figure, high output power and high gain.



### O-band Optical Fiber Amplifier mOFA-C1


is a revolutionary fiber amplifier designed to work in the O-band. Based on bismuth doped optical fiber. Ideal for amplification of LAN WDM and CWDM formats with a single amplifier, the mOFA-C1 features a low noise figure and linear performance that make it ideal for 400/800GE+ transmission testing.

## Optical Signal Conditioning



### Variable Optical Attenuator

**mVOA-C1** is the industry's most compact modular solution. Available with one, two, or four variable optical attenuators (VOA) per module with or without an internal power meter or with output tap monitor. Enabling single-level control for receiver and amplifier testing.



## COMING SOON

### High Density Variable Optical Attenuator

**mVOA-C2B** is a compact device designed to enhance optical network performance. With low power consumption and fast response times, it's ideal for modern, energy-efficient networks. The mVOA-C2B offers a 45dB attenuation range for precise control and an optional internal power meter for real-time monitoring and optimization. It supports triggering for easy integration into complex setups and is built for durability in demanding conditions, making it a valuable asset for large-scale network deployments.



### Passive Utility Device

**mUTL-C1** is a passive utility module includes, couplers, splitters, mux/demux, band-pass filters and even blank modules for customer supplied components.



### Polarization Scrambler Controller

**mPCX-C1** is a polarization scrambler that scrambles, controls and provides stabilization for applications such as temporal depolarization and 100G+ coherent interface testing. It offers six pre-defined scrambling patterns, random, Rayleigh distribution, ring, polar ring pattern, oscillating ring pattern, random ring pattern and one discrete user defined mode. Offered in C, L, O and All-band variants.



### Variable Back Reflector



**mVBR-C1** provides precise levels of return loss to transmitters, enabling measurement of system sensitivity and system degradation as a function of back reflection. Offered in SM and MM variants.



### Multiport Tunable Filter

**mTFX-C2** is a C- and L-band multiport tunable filter that simplifies test signal management for next-generation 100 G+ interface, sub-systems and system test. It combines variable attenuator, switch, power meter, and DWDM multiplexer functions to dramatically simplify photonic testing of coherent interfaces, amplifier, and DWDM systems.

# Optical Signal Switching and Routing

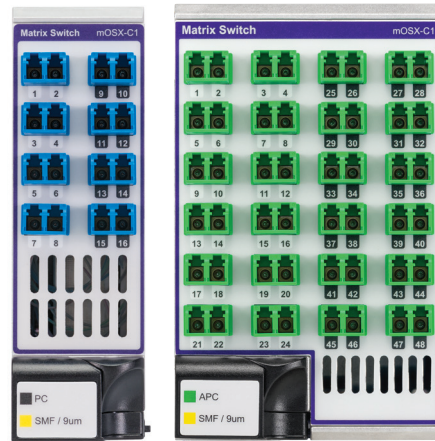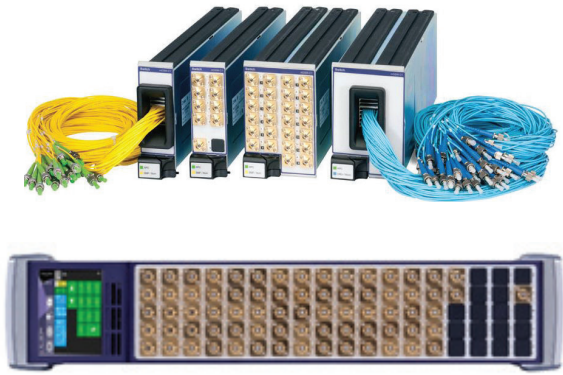

## Optical Switch Solutions

**mOSW-C1/mISW-C1** are the industry's gold standard for loss and repeatability. With over 80 variations available, there is a configuration ideally suited to all applications. Switches range from 1x2 to 1x176 with options for internal power monitoring, direction monitoring, and power trim. Available in modular plug-in or 19-inch tray.

## Cross Connect Optical Switch

**mOSX-C1** is a cross connect optical switch that provides high performance and reliability. Available as 16, 32 and 48 port common connection (CC) cassette, the mOSX supports any-to-any port combinations up to the total number of ports on the cassette. It also supports MxN combinations.

## Polatis Switch



The Polatis range of optical matrix switches are high-performance, fully non-blocking all-optical matrix switches, available with port counts from 4x4 up to 192x192. They are designed to meet the highest performance, security and reliability needs of mission-critical applications with low optical loss, compact size, low power requirements and fast switching speeds.



## Optical Power and Spectral Measurements



### Optical Power Meter

**mOPM-C1** optical power meters are available with one, two, or four power heads per module with four unique performance ranges. There are versions available for all applications. Models with 110 dBm dynamic range are complimented by versions that support 26 dBm input power. Features accuracy, high linearity and extremely low PDL. Two remote head power meter versions are available, with and without an integrating sphere. The integrating sphere version is ideal for high power or multi-fiber connectors.



**High Density Optical Power Meter mOPM-C2B** is a compact module with up to 24 power-sensor channels, boosting efficiency in multi-device testing. It offers precise measurements across a broad wavelength and dynamic range, ideal for data centers and telecom hubs. Durable and user-friendly, it's perfect for both production and lab use.



**Optical Spectrum Analyzer Module mOSA-C1** is a single slot diffraction grating based spectral measurement system. Based on a next generation monochromator design, the OSA is designed to operate over the 1255 to 1655 nm single-mode fiber range.



**High-Resolution Optical Spectrum Analyzer mHROSA-A2** is a high-resolution optical spectrum analyzer that combines sub-GHz resolution performance and compact modularity in a single slot cassette.

The LightTest™ family are application specific, integrated test solutions that leverage the power of the MAP Series Super-Application or PC based software. Built with specialized MAP modules or assemblies of LightDirect modules, LightTest solutions are typically used in bench test applications but can also be combined in larger, multi-modules customer driven automated test systems.



### Passive Connector Test Solutions

VIAMI Solutions passive component/connector test solution (PCT) consists of a powerful family of modules, software, and peripherals for testing IL, RL, physical length, and polarity of optical connectivity products. Leveraging the modularity and connectivity of the VIAMI MAP platforms, the PCT can be configured for R&D, production, or qualification test environments and can address all key fiber types from single mode through OM1 and OM4.



### Single Fiber Insertion Loss and Return Loss Test System

The **PCT-rm** is a MAP-220 based Single mode Insertion Loss (IL) and Return Loss (RL) test meter for single fiber connector applications. Part of the MAP-Series PCT solution family, it features fully EF-compliant multimode Insertion Loss test meters with connector adapters that can be configured for all connectivity applications to ensure maximized productivity.




### Swept Wavelength System

**mSWS** are swept wavelength test solutions for manufacturing and new device development of passive DWDM devices, ROADMs & Circuit Packs. Provides full characterization of wavelength.



### Optical Component Environmental Test Systems

At the core of **OCETS Plus** is a pair of custom-grade programmable switches (1xN configuration). OCETS switches are specified to higher levels of IL repeatability and background RL than analogue-grade switches. Therefore, the implementation of an OCETS Plus system represents an improvement over the capability of any in-house system that utilizes analogue-grade switches.

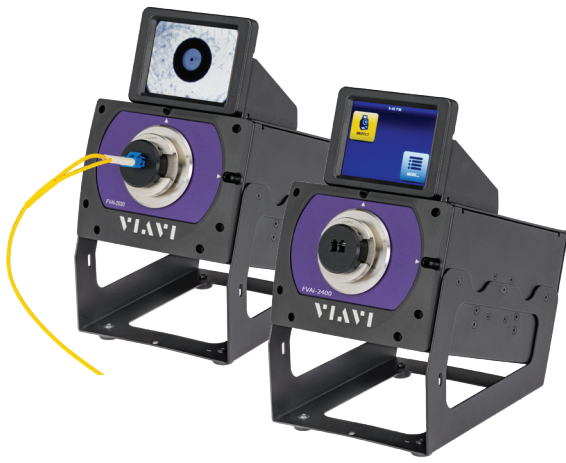

### FV Benchtop Microscopes

FV microscopes help optical connectivity manufacturers ensure clean fiber connectors throughout their manufacturing process by providing end-face visibility with dual magnification, automated analysis, and auto-focus capabilities.

There are two variants of FV microscopes, 30x (2030) and 400x (2400). All microscopes provide dual magnification, automated analysis, and options for auto-focus. The 2030 microscope is ideal for confirming connector cleanliness throughout manufacturing process while the 2400 microscope is targeted for high resolution applications including confirming polish quality and certifying connector quality.



**FVAM-1000 Benchtop Microscope** is a completely automated inspection solution for multifiber connectors such as MPO. This all-in-one system automatically inspects and analyzes every fiber of an MPO or other multifiber connector with reliability and speed. With FVAm series benchtop microscopes, manufacturing facilities can ensure optimized quality and performance of MPO trunk cables and assemblies at every stage of production.

**NEW**



**FVAM-2000 Benchtop Microscope** is a first of its kind benchtop microscope designed for transceiver inspection in manufacturing. It integrates VIAMI's advanced software tools and supports REST drivers for seamless integration with third-party systems. The microscope offers live video, pass/fail results, and automatic storage of images and data. With its PanOptic Imaging Engine, the FVAm-2000 provides a full edge-to-edge view with high magnification and resolution, enabling detailed multi-fiber connector inspection in under 8 seconds.



### CleanBlastPRO™

CleanBlastPRO™ is a fiber optic end-face cleaning system that component and connectivity manufacturers and integrators can easily deploy throughout their production facilities to ensure clean fiber connectors.

Providing automated connector cleaning at the push of a button, CleanBlastPRO™ streamlines cleaning workflows with intuitive operation, fast throughput, and high-yield performance.

## Accessories

Accessories (Optional)	Product and description	
<b>Fiber Inspection Tools</b>	FiberChek probe microscope	One-button FiberChek Probe delivers a reliable, fully autonomous, handheld inspection solution for every fiber technician.
	P5000i fiber microscope	Automated Fiber Inspection & Analysis Probe provides PASS/FAIL capability to PC, laptops, mobile devices and VIAVI test solutions. The PCT application offers an inspection pass/fail.
<b>Replacement Parts</b>	Mating sleeves	AC500;FC/PC-FC/PC Universal Connector Adapter
		AC501;FC/PC-SC/PC Universal Connector Adapter
		AC502;FC/APC-FC/APC Universal Connector Adapter
		AC503;FC/APC-SC/APC Universal Connector Adapter
<b>Detector Adaptors</b>	A complete range of single ferrule, duplex, and bare fiber power meter adaptor are available at VIAVI including MPO, FC, LC and Integrating spheres. Refer to the AC adaptor selection guide for more information.	

A wider range of inspection tools are available at VIAVI. More information about the products and accessories can be accessed through our website at [www.viavisolutions.com](http://www.viavisolutions.com). For further assistance please contact your local VIAVI account manager or VIAVI directly at 1-844-GO-VIAVI (1-844-468-4284) or to reach the VIAVI office nearest you, visit [viavisolutions.com/contacts](http://viavisolutions.com/contacts).



Power meter adaptors

## MAP-300 Calibration

VIAVI Provides three complementary calibration paths for the MAP-300



**Service Center**  
Comprehensive and includes minor repairs



**Field**  
Onsite technician, tests key parameters



**FlexCal**  
Easy, convenient self-service, tests key parameters

1675.900.1123



Contact Us **+1 844 GO VIAVI**  
(+1 844 468 4284)

To reach the VIAVI office nearest you, visit [viavisolutions.com/contacts](http://viavisolutions.com/contacts).

© 2024 VIAVI Solutions Inc. Product specifications and descriptions in this document are subject to change without notice. Patented as described at [viavisolutions.com/patents](http://viavisolutions.com/patents) mapseries-sg-lab-nse-ae 30191094 904 0924